

1504/51567

REC'D 02 SEP 2004

WIPO

PCT

PA 1200073

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

July 27, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/497,995

FILING DATE: August 26, 2003

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS



P. SWAIN  
Certifying Officer

Best Available Copy

PATENT APPLICATION SERIAL NO. \_\_\_\_\_

U.S. DEPARTMENT OF COMMERCE  
PATENT AND TRADEMARK OFFICE  
FEE RECORD SHEET

08/28/2003 KBETEM1 00000084 141270 60497995

01 FC:1005 160.00 DA

PTO-1556  
(5/87)


08/26/03  
16367 U.S. PTO

Attorney Docket No. US030283P

## PROVISIONAL APPLICATION COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No.: **EL995158099US**

1. INVENTOR(S)		
Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)
Pen	Li	San Jose, CA
2. TITLE OF THE INVENTION		
DATA SEGREGATION AND FRAGMENTATION IN A WIRELESS NETWORK FOR IMPROVING VIDEO PERFORMANCE		
3. CORRESPONDENCE ADDRESS		
Intellectual Property & Standards Philips Electronics North American Corporation 1109 McKay Drive MS SJ41 San Jose, California 95131 Fax: (408) 474-9086		 <b>24738</b> PATENT TRADEMARK OFFICE
4. ENCLOSED APPLICATION PARTS		
<input checked="" type="checkbox"/> Specification (10) <input checked="" type="checkbox"/> Drawing(s) (3) <input checked="" type="checkbox"/> Return-Receipt Postcard		
5. METHOD OF PAYMENT		
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number 14-1270. Filing Fee Amount: \$160		

Date 8/26/03

Respectfully submitted,

By Michael J. Ure  
Michael J. Ure, Reg. 33,089  
(408) 474-9071

16235 U.S. PTO  
60/497995

# **DATA SEGREGATION AND FRAGMENTATION IN A WIRELESS NETWORK FOR IMPROVING VIDEO PERFORMANCE**

## **FIELD**

The present invention relates to communications in a wireless network. In particular, the invention related to data segregation and fragmentation in a wireless network for  
5 improving the performance of video communication.

## **BACKGROUND**

Wireless communications are becoming very popular because allow users to move  
freely without being tied to a desk or wire. However, users are continually demanding  
10 greater performance and better communication with their wireless devices. Consequently,  
techniques that improve the performance of wireless devices are extremely useful and may  
have great commercial value. One aspect that can be improved has to do with the way  
messages are fragmented so that they may be efficiently communicated between devices.

In wireless communication standards such as 802.11 Wireless Local Area Network  
15 (WLAN) standard, a technique called fragmentation divides large messages into smaller  
fragments so that they can be transmitted efficiently between devices. Ordinarily, the  
fragment length is fixed, however, the longer the fragments the more likely that they will be  
corrupted during the communication. On the other hand, the smaller fragmentation length  
means larger overhead and more transmit and acknowledge (ACK) rounds which will  
20 decrease the system throughput. So if the channel condition is good, the longer fragment  
length will increase the system throughput. Some techniques for manually modifying the  
fragment size or for dynamically modifying the fragment size are known in the art, but they  
do not adequately take into account certain channel parameters and variables that would be  
useful for optimizing the fragment length.

25 In the 802.11 specification Figure 1 is provided to show the standard fragmentation  
process of partitioning a media access control (MAC) service data unit (MSDU) into smaller  
MAC level frames, MAC protocol data units (MPDUs). Fragmentation creates MPDUs

smaller than the original MSDU length to increase reliability, by increasing the probability of successful transmission of the MSDU or MMPDU in cases where channel characteristics limit reception reliability for longer frames.

5 As described above, the conventional fragmentation technique applies the same fragmentation threshold to all data packet regardless of their importance. What is needed is a technique for identifying the data so that more important data packets can be segregated from less important data packets. The invention is directed to a technique for segregating such data, especially under the 802.11 WLAN standard.

10

## SUMMARY

The present invention addresses the identified problems and provides a wireless communication device with a segregation circuit, especially applied to video data under the 802.11 Wireless Local Area Network (WLAN) standard. This segregation allows the wireless communication device to achieve an increased quality of video communication and  
15 reception over the wireless communication channel.

A wireless communication device comprises an input terminal configured to communicate data with a processor. A segregation circuit is coupled to the input terminal and configured to identify predetermined data and to separate more important data from less important data. A memory is configured to store at least one parameter relevant to the  
20 wireless communication protocol. A modem is coupled to segregation circuit and the memory and is configured to communicate using a wireless protocol over a wireless channel, and includes a framer configured to fragment the segregated data based at least in part on the at least one parameter stored in the memory. In one aspect of the invention, the wireless protocol is 802.11. Advantages of the invention include the ability to achieve high quality  
25 video communication over a wireless communication link with less chance of dropping important data.

In one aspect of the invention, the memory is configured to store a fragmentation threshold parameter, which is set to be greater than the segregation circuit allocates for more

important data. The framer is configured to fragment the segregated data based at least in part of the fragmentation threshold parameter.

In one aspect of the invention, the predetermined data is video data and the more important data is the video control data and the less important data is the video payload data.

5 In one aspect of the invention, the video data is MPEG-2 format video data.

Advantages of the invention include the ability to achieve high quality video communication over a wireless communication link with less chance of dropping important data.

10

#### DESCRIPTION OF THE DRAWINGS

The invention will be described with reference to the following figures in which:

Figure 1 is a diagram showing fragmentation under the 802.11 communication protocol specification;

15 Figure 2 is a simplified block diagram showing two wireless devices using an exemplary 802.11 communication protocol according to an embodiment of the invention;

Figure 3 is an exemplary wireless frame according to the 802.11 specification;

Figure 4 is a diagram showing an internal functional block diagram of the modem according to an embodiment of the invention;

20 Figure 5 is a diagram showing a data packets for a video application aspect of the invention; and

Figure 6 is a flowchart showing the inventive operating steps according to an embodiment of the invention.

#### DETAILED DESCRIPTION

25

The invention is described with reference to a number of embodiments, which may include specific implementations. The invention is intended to describe the best mode of the invention, but other similar techniques and technologies can be used to perform the invention. For example, reference is made to the 802.11 Wireless Local Area Network (WLAN) protocol, but other protocols may be implemented in the invention. Likewise, while

reference is made to a segregation circuit for segregating more important data from less important data, the invention can also be performed in software by a processor or other device.

#### A. Fragmentation Using Wireless Protocol Standard (802.11)

5           As shown in Figure 1, a media access control (MAC) device may fragment and reassemble directed MAC service data units (MSDUs) or MAC management protocol data units (MMPDUs). Each of these fragments is referred to as a frame in communication between the wireless devices. Fragmentation is described in detail in the 802.11 specification, which is available on the Internet at the IEEE web site, <http://www.ieee.org>.  
10       While the specification describes standard techniques for performing fragmentation based on a fragmentation threshold, it does not teach or suggest techniques for improving certain types of communication performance by segregating more important data and less important data as described herein.

          Figure 2 is a simplified block diagram showing two wireless devices 102 and 104  
15       using an exemplary 802.11 communication protocol according to an embodiment of the invention. The exemplary devices 102 and 104 are the same so reference is made to one of the devices, e.g. 102. A modem 110 is constructed that is coupled to a memory 112 for storing communication parameters, for example a fragmentation threshold. In at least one embodiment, the fragmentation threshold can be modified by the modem, a processor or other  
20       means, but such modification is not required by the invention. A segregation circuit 150 is coupled between the modem and the Data I/O terminal. The segregation circuit performs functions described below to separate important data from less important data. While the segregation circuit is shown as positioned between the modem and the Data I/O terminal, in the exemplary embodiment of the invention, the segregation circuit only affects the input data,  
25       which is sent to the modem to be transmitted over the wireless protocol.

          Figure 3 is an exemplary wireless frame 200 according to the 802.11 specification, where the frame represents one of the fragments as described above. The modem 110 performs the fragmentation and constructs the frame including the frame body, which can be 0-2312 bytes long, depending on the fragmentation threshold stored in the memory 112.

## B. Segregation and Fragmentation

Figure 4 is a diagram showing an internal functional block diagram of the modem according to an embodiment of the invention. The modem 110 includes a number of components, for example, a transmitter 160 and receiver 162. In addition, the modem  
5 includes a framer 152. As described above, the framer typically applies the same fragmentation threshold to all data uniformly. The invention further includes a segregation circuit 150 outside the modem 110 to segregate more important data from less important data based on the type of data.

In an exemplary embodiment, the predetermined data is video data, and specifically  
10 MPEG-2 data. The segregation circuit 150 is configured to identify the MPEG-2 data and to separate the more important control data from the less important payload data as described below.

In a preferred embodiment, the fragmentation threshold parameter stored in the memory is greater than the length of the important control data. In this manner, when the  
15 framer fragments the segregated data based on the fragmentation threshold parameter, the important data is not fragmented and has a greater chance of being received properly by the receiver. In most applications, the control data is significantly shorter than the fragmentation threshold, and therefore, will have significantly higher chance of being properly received as compared to less important data that is fragmented at the full length of  
20 the fragmentation threshold.

Figure 5 is a diagram showing a data packets for a video application aspect of the invention. An exemplary MPEG-2 program stream is shown, which has two functions. One is to pack the MPEG-2 Program Stream into transport formats according to the requirements of different OSI seven layers such as RTP, RCP, IP and others. The other  
25 function is to ensure that when packed into MSDU format, the PACK Header will exist solely in one MSDU rather than coexisting with the rest of the packets.

## C. Method of Operation

Figure 6 is a flowchart showing the inventive operating steps according to an embodiment of the invention. In step 502, the modem receives video data (e.g. MPEG data)



and identifies it as one of the classes of predetermined data which will be segregated by the segregation circuit. In step 504, the segregation circuit segregates the data into more important data (e.g. control data) and less important data (e.g. payload data). In step 506, the framer frames the segregated data based on at least one parameter stored in memory (e.g. the fragmentation threshold). In step 508, the modem transmits the data to other device(s) using the wireless protocol over the wireless link.

#### D. Conclusion

Advantages of the invention include the ability to achieve high quality video communication over a wireless communication link with less chance of dropping important data.

Having disclosed exemplary embodiments and the best mode, modifications and variations may be made to the disclosed embodiments while remaining within the subject and spirit of the invention as defined by the following claims.

## CLAIMS

1. A wireless communication device comprising:
  - an input terminal configured to communicate data with a processor;
  - 5 a segregation circuit 150 coupled to the input terminal and configured to identify predetermined data and to separate more important data from less important data;
  - a memory 112 configured to store at least one parameter relevant to the wireless communication protocol; and
  - a modem 110 coupled to segregation circuit and the memory and configured to
  - 10 communicate using a wireless protocol over a wireless channel, including a framer 152 configured to fragment the segregated data based at least in part on the at least one parameter stored in the memory.
2. The wireless communication device of claim 1, wherein:
  - 15 the memory 112 is configured to store a fragmentation threshold parameter, which is set to be greater than the segregation circuit allocates for more important data; and
  - the framer 152 is configured to fragment the segregated data based at least in part of the fragmentation threshold parameter.
- 20 3. The wireless communication device of claim 1, wherein:
  - the predetermined data is video data and the more important data is the video control data and the less important data is the video payload data.
4. The wireless communication device of claim 2, wherein:
  - 25 the predetermined data is video data and the more important data is the video control data and the less important data is the video payload data.
5. The wireless communication device of claim 5, wherein:
  - the video data is MPEG-2 format video data.

6. The wireless communication device of claim 6, wherein:  
the video data is MPEG-2 format video data.

5 7. A method of communicating between wireless modems using a wireless protocol,  
comprising the steps of:

storing at least one parameter relevant to the wireless communication protocol;

identifying predetermined data and segregating the predetermined data to separate  
more important data from less important data, thereby creating segregated data;

10 framing the segregated data based at least in part on the at least one stored parameter;  
and

communicating using the wireless protocol over a wireless channel with at least one  
other modem.

15 8. The method of claim 7, wherein:

the storing step including the step of storing a fragmentation threshold parameter,  
which is set to be greater than the segregation circuit allocates for more important data; and

the framing step including the step of fragmenting the segregated data based at least in  
part of the fragmentation threshold parameter.

20

9. The method of claim 7, wherein:

the identifying step includes the step of identifying video data and segregating the  
video data to separate the more important video control data and the less important video  
payload data.

25

10. The method of claim 8, wherein:

the identifying step includes the step of identifying video data and segregating the  
video data to separate the more important video control data and the less important video  
payload data.

11. The method of claim 9, wherein:  
the video data is MPEG-2 format video data.
- 5 12. The method of claim 10, wherein:  
the video data is MPEG-2 format video data.

# **DATA SEGREGATION AND FRAGMENTATION IN A WIRELESS NETWORK FOR IMPROVING VIDEO PERFORMANCE**

## **ABSTRACT**

A wireless communication device comprises an input terminal configured to  
5 communicate data with a processor. A segregation circuit 150 is coupled to the input  
terminal and configured to identify predetermined data and to separate more important data  
from less important data. A memory 112 is configured to store at least one parameter  
relevant to the wireless communication protocol. A modem 110 is coupled to segregation  
circuit and the memory 112 and is configured to communicate using a wireless protocol over  
10 a wireless channel, and includes a framer 152 configured to fragment the segregated data  
based at least in part on the at least one parameter stored in the memory. In one aspect of  
the invention, the wireless protocol is 802.11. Advantages of the invention include the  
ability to achieve high quality video communication over a wireless communication link with  
less chance of dropping important data.

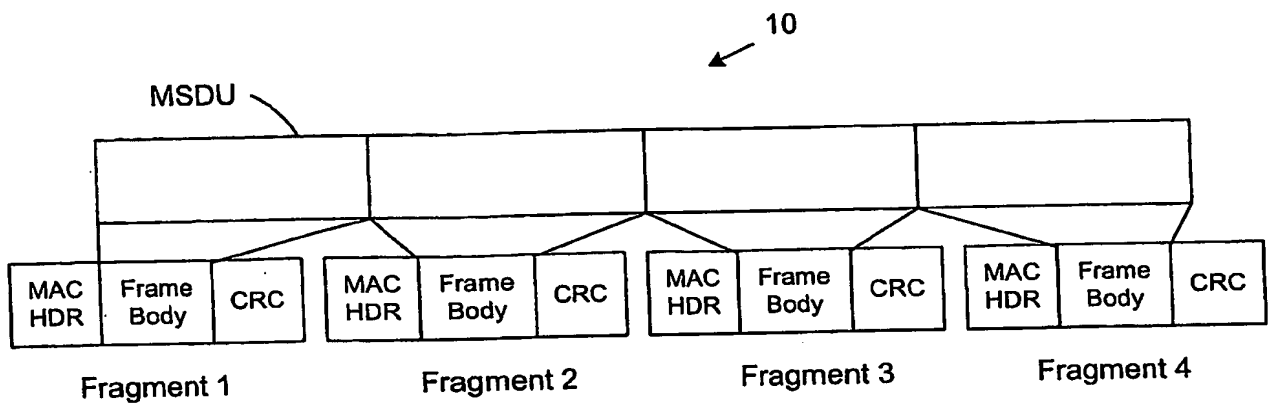


Figure 1  
(prior art)

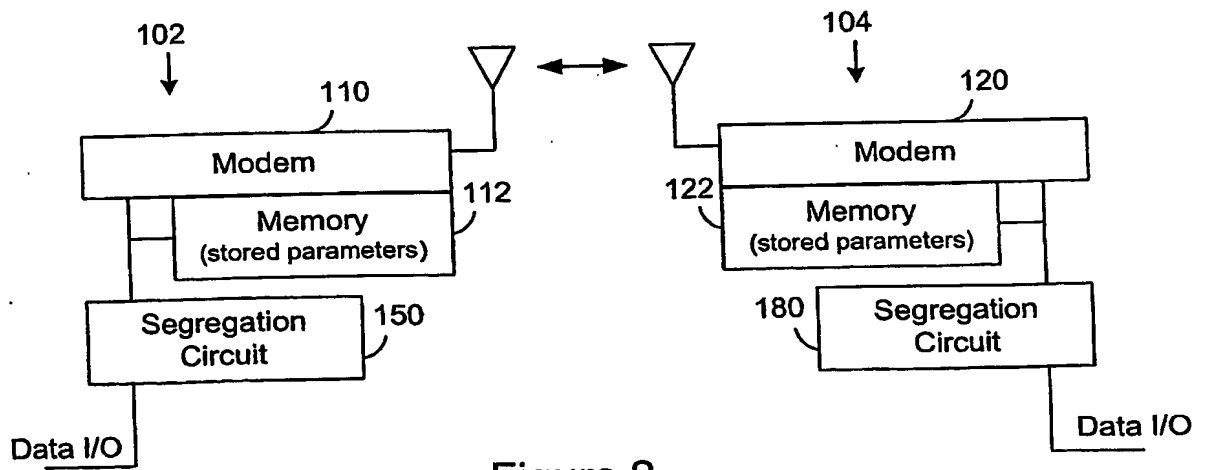


Figure 2

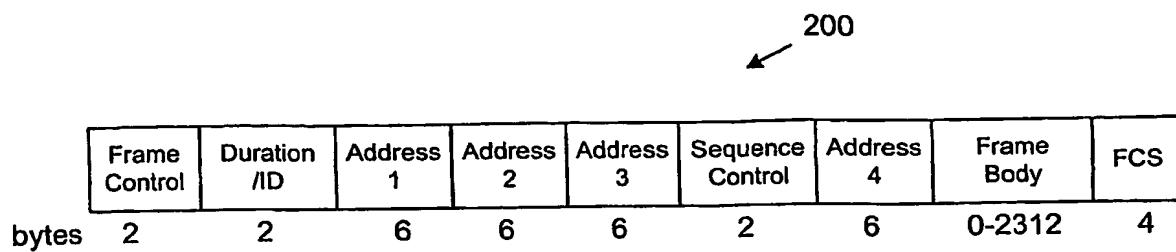


Figure 3

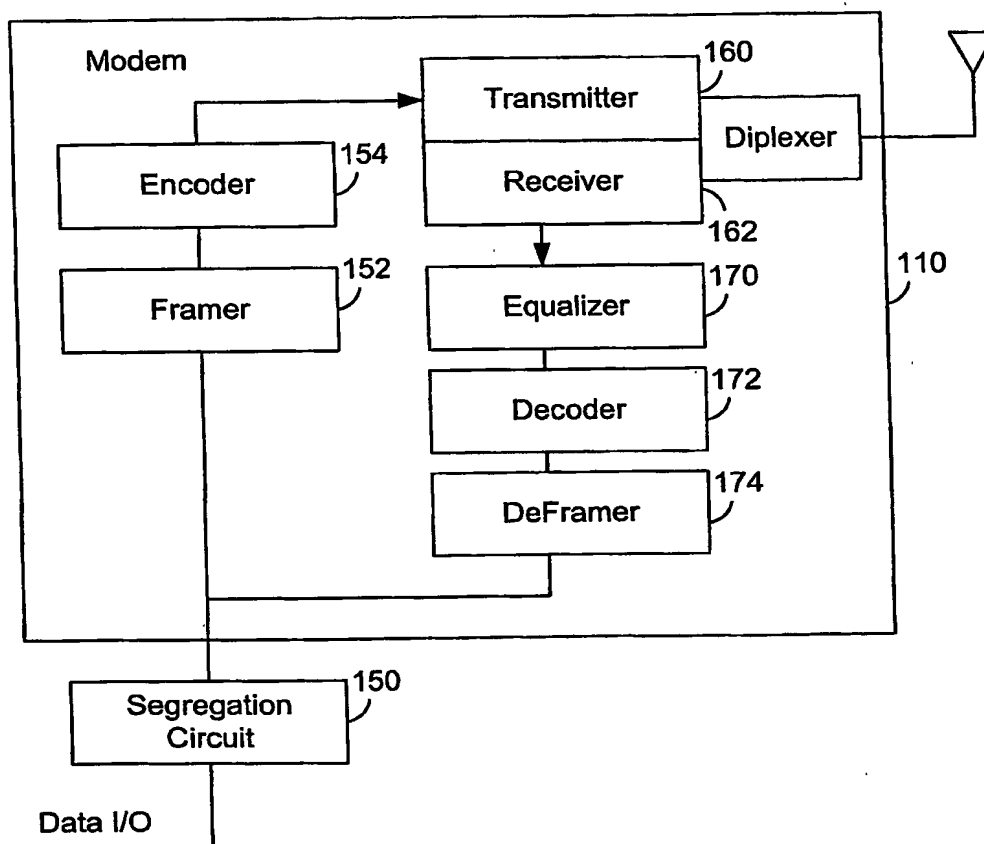


Figure 4

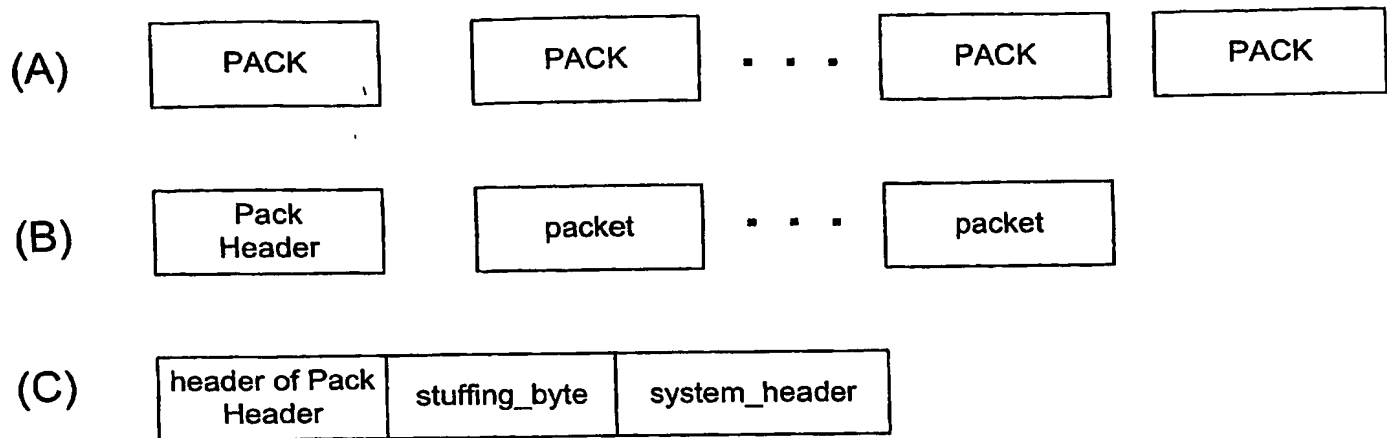


Figure 5

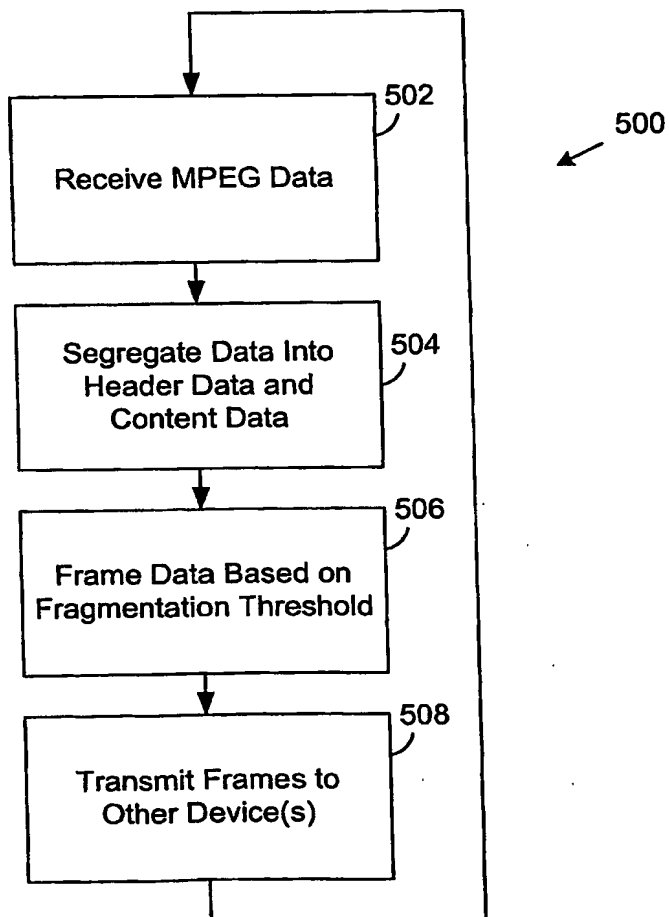


Figure 6



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**